

elka

14MM HERRINGBONE DARK SMOKE

real wood engineered

flooring

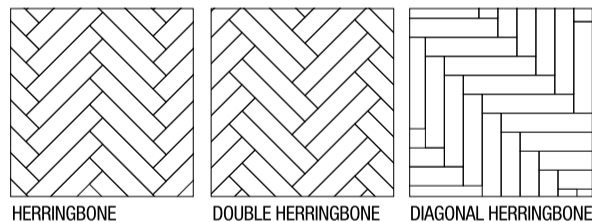


Image represents 1m²

SPECIES:	European Oak
FINISH:	Oiled, Smoked, Brushed
SIZE:	120 x 600 x 14mm / 3mm wear layer

OPTIONS FOR INSTALLATION

All planks come with grooves on three sides which allow you to achieve multiple design patterns



COLOUR AND GRAIN

Colour: This product is a fumed product (ammonia treatment). The reaction on the wood which gives the darker colour is dependent on the tannin content of the wood (the more tannin, the darker the result). The tannin content depends on the origin of the oak but even trees from the same forest have a different tannin content. So a fumed product always gives you more colour variation than a stain but the tone is far warmer, highlights character and helps bring nature into your home. Flooring must be mixed well to achieve a balanced look. **Character:** Due to the low tannin content of sapwood "new growth of the tree" the reaction to ammonia treatment is unpredictable. **Variations within species and grades:** Open with longer rays than red oak. Occasional crotches, swirls and burls. Plain sawn boards have a plumed or flared grain appearance. Considerable variation among boards in colour and grain texture.

Specification	
Board Dimensions:	120 x 14mm x 600mm (3mm wear layer)
Grade:	Rustic 'A/B/C' (Smoke & Oil)
Oak origin:	Mixed EU sources
Profile:	T&G
Bevel:	G4 1.2mm 'long & short edge'
Pack Size:	0.864m ²
Planks per pack:	6 Layers (12 planks)
Construction:	Oak Wear Layer, Eucalyptus & Poplar multi ply core
Oil / Lacquer:	UV Cured Oil - 2 coats
Adhesive:	E1
Guarantee:	25 Years Structural - 1 Year Surface treatment
Bathroom:	Must never install in this area
Conservatory:	Yes
Underfloor heating:	Yes - a maximum contact temp. of 27°C (back of board & sub floor). <i>Embedded systems only</i>
Sheen:	10% +/-
Maintenance:	Elka Oiled maintenance kit
Installation:	Full stick with Elka Trowel Flex or other PU / MS adhesive

PREFINISHED	All Species	RUSTIC	A – Grade 30%	B – Grade 30%	C – Grade 40%	D – Grade	For full grading breakdown visit www.elkaflooring.co.uk
-------------	-------------	--------	------------------	------------------	------------------	-----------	--

INSTALLATION IMPLIES ACCEPTANCE
NO WARRANTY WILL BE OFFERED FOR APPEARANCE
RELATED CLAIMS ONCE THE PRODUCT IS INSTALLED

Note: Real wood flooring is a natural product and is subject to natural variations. Any dissatisfaction on grade quality or definition **must** in all cases be notified to Unilin prior to installation.

Imported and distributed by Unilin Distribution
T: 0844 811 8288

visit our website for full grade specification

www.elkaflooring.co.uk

 **UNILIN**
FOR SMART LIVING