


18MM ENHANCED OAK real wood engineered flooring

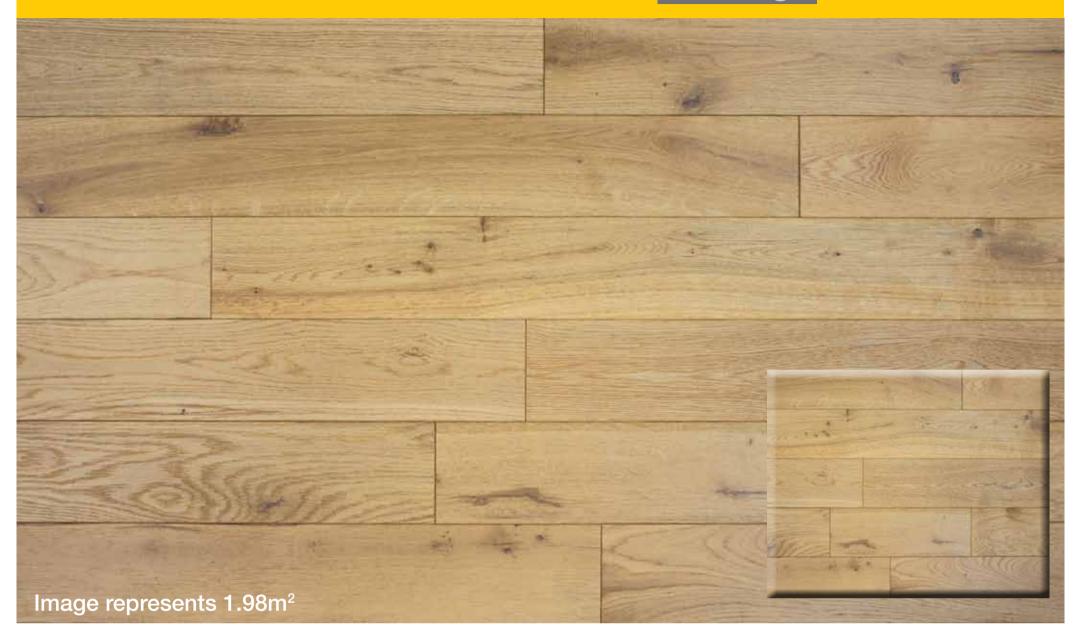

SPECIES:	European	White	Oak
----------	----------	-------	-----

SPECIES: Europ	bean White	Oak		Specification					
•			Board Dimension	s: 18 x 150	18 x 150 x random lengths 400-1800mm (4mm wear layer)				
FINISH: Brush	ned Matt La	cquer		Grade: Rustic 'B/C/D' (Black re			d knots & small repaired splits allowed)		
SIZE: 18 x 150 x Random Lengths		5	Oak origin:	Mixed EL	Mixed EU sources				
				Profile:	T&G	T&G			
Colour and grain Colour: Heartwood is light brown; some boards may have a pinkish tint or a slight greyish cast. Sapwood is white to cream.			Bevel:	B4 1.2mr	B4 1.2mm 'long & short edge'				
			Pack Size:	1.98m ²	1.98m ²				
			Planks per pack:	8 Layers	8 Layers 1860mm (600mm +)				
			Construction:	Oak Wea	Oak Wear Layer, Eucalyptus core & back				
Grain: Open, with longer rays than red oak. Occasional crotches, swirls and burls. Plain sawn boards have a plumed or flared grain appearance. Softer grain is removed in the brushing process giving a textured surface.			Oil / Lacquer:	UV Cureo	UV Cured Lacquer				
			Adhesive:	E1	E1				
			Guarantee:	25 Years	25 Years Structural - 1 Year Lacquer				
			Bathroom:	Must nev	Must never install in this area				
Variations within species and grades: Considerable variation among boards in colour and grain texture.				Conservatory:	Yes				
				Underfloor heating Embedded systems only	DPM and	Yes if installed as a floating floor over underlay incorporating DPM and a maximum contact temp. of 27°C (back of board & sub floor). Electric matting is not suitable or guaranteed.			
				Maintenance:	Elka Laco	Elka Lacquered maintenance kit			
			Installation:	Float over	Float over underlay with D3 adhesive, full stick/batten with Elka flex, nail				
PREFINISHED	All Species	RUSTIC	A – Grade -		0% – Grade	D – Grade 40%	For full grading breakdown visit www.elkaflooring.com		

INSTALLATION IMPLIES ACCEPTANCE NO WARRANTY WILL BE OFFERED FOR APPEARANCE RELATED CLAIMS ONCE THE PRODUCT IS INSTALLED

Note: Real wood flooring is a natural product and is subject to natural variations. Any dissatisfaction on grade quality or definition **must** in all cases be notified to Unilin prior to installation.

Imported and distributed by Unilin Distribution T: 0844 811 8288

visit our website for full grade specification

www.elkaflooring.com

