


# **18MM WALNUT**

# real wood engineered flooring

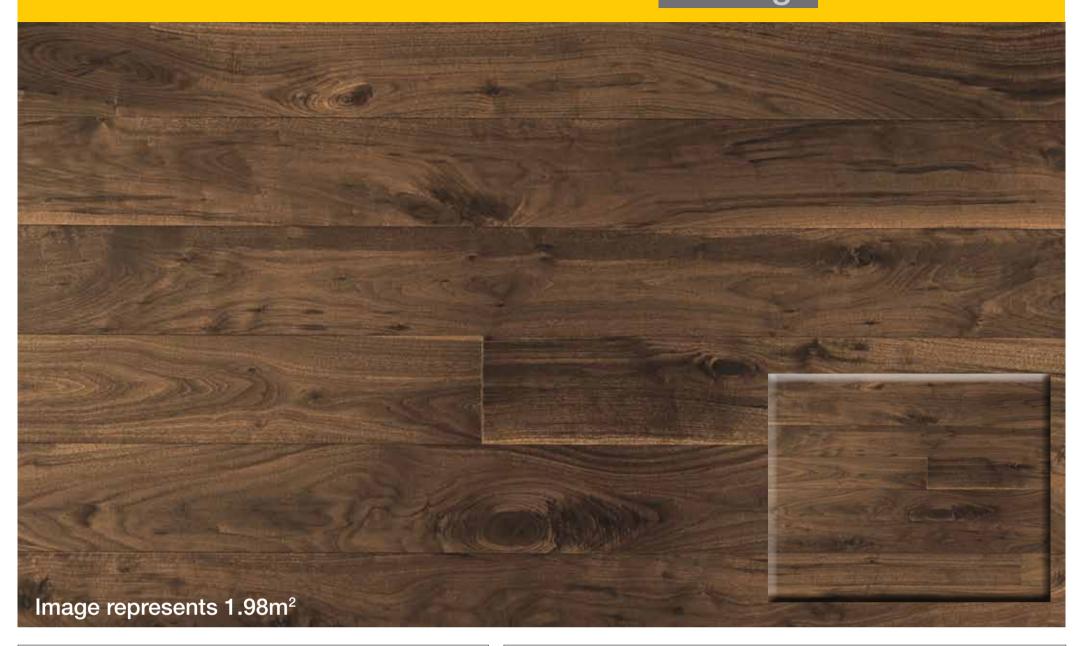

SPECIES:	American Black Walnut		
FINISH:	Lacquer		
SIZE:	18 x 150 x Random Lengths		

## Colour and grain

# Colour:

Heartwood ranges from a deep, rich dark brown to a purplish black. Sapwood is nearly white to tan. Difference between heartwood and sapwood colour is great; some flooring manufacturers steam lumber to bleed the darker heartwood colour into the sapwood.

### Grain:

Mostly straight and open, but some boards have burled or curly grain. Arrangements of pores is similar to hickories and persimmon, but pores are smaller in size.

Variations within species and grades: Great variety of colour and figure within species, as well as variation in colour among boards, especially in lower grades -Elka is shaded to help blend variation.

Specification					
Board Dimensions:	18 x 150 x random lengths 400-1800mm (4mm wear layer)				
Grade:	Rustic 'B/C/D' (Black repaired knots & small repaired splits allowed)				
Walnut origin:	America				
Profile:	T&G				
Bevel:	B4 1.2mm 'long & short edge'				
Pack Size:	1.98m²				
Planks per pack:	8 Layers 1860mm (600mm +)				
Construction:	Walnut Wear Layer, Eucalyptus & poplar multi ply				
Oil / Lacquer:	UV Cured Lacquer				
Adhesive:	E1				
Guarantee:	25 Years Structural				
Bathroom:	Must <b>never</b> install in this area				
Conservatory:	Yes				
Underfloor heating: Embedded systems only	Yes if installed as a floating floor over underlay incorporating DPM and a maximum contact temp. of 27°C (back of board & sub floor). Electric matting is not suitable or guaranteed.				
Maintenance:	Elka Lacquered maintenance kit				
Installation:	Float over underlay with D3 adhesive, full stick/batten with Elka flex, nai				

PREFINISHED	All Species	RUSTIC	A – Grade -	B – Grade 30%	C – Grade 30%	D – Grade 40%	For full grading breakdown visit www.elkaflooring.com

INSTALLATION IMPLIES ACCEPTANCE
NO WARRANTY WILL BE OFFERED FOR APPEARANCE
RELATED CLAIMS ONCE THE PRODUCT IS INSTALLED

Note: Real wood flooring is a natural product and is subject to natural variations. Any dissatisfaction on grade quality or definition **must** in all cases be notified to Unilin prior to installation.

Imported and distributed by Unilin Distribution T: 0844 811 8288

visit our website for full grade specification

