

## Herringbone Light Smoked Oak

PACK SIZE:  
0.864m<sup>2</sup> /pk

PIECES /PK:  
12 planks


BOARD DIMENSIONS:  
14 x 120 x 600mm

PRODUCT CODE:  
ELKA14HBLSOAK

**14MM**  
HERRINGBONE

TONGUE & GROOVE

SPECIES:	European Oak
FINISH:	Oiled, Whitewashed, Brushed
SIZE:	120 x 600 x 14mm / 3mm wear layer

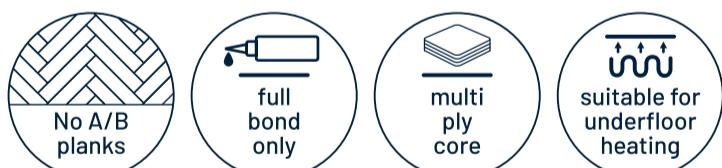

### COLOUR AND GRAIN

This product is created through a fuming (ammonia) process, where the resulting darker colour depends on the natural tannin content of the oak—higher tannin levels produce deeper tones. Because tannin varies between trees, even within the same forest, fumed products naturally display more colour variation than stained finishes, but provide a warmer, more characterful appearance that enhances the natural beauty of the wood. Boards must be well-mixed during installation to achieve a balanced overall look.


Rustic oak showcases strong natural character, including prominent grain patterns, longer medullary rays, and occasional crotches, swirls, and burls. You will also find natural knots, cracks, and structural features that have been professionally repaired and filled to maintain stability while preserving the authentic appearance of the timber. Plain-sawn boards may display plumed or flared grain formations, further enhancing the lively, varied look. This inherent diversity in colour, figure, and grain is an intentional and defining feature of rustic wood flooring, contributing to its warm, natural charm.

### SPECIFICATION

Board Dimensions:	120 x 600mm x 14mm (3mm wear layer)
Grade:	Rustic 'A/B/C' (Smoke & Oil)
Oak origin:	Mixed EU sources
Profile:	T&G
Bevel:	G4 1.2mm 'long & short edge'
Pack Size:	0.864m <sup>2</sup>
Planks per pack:	6 Layers (12 planks)
Construction:	Oak Wear Layer, Eucalyptus & Poplar multi ply core
Oil / Lacquer:	UV Cured Oil - 2 coats
Adhesive:	E1
Guarantee:	25 Years Structural - 1 Year Surface treatment
Bathroom:	Must never install in this area
Conservatory:	Yes
Underfloor heating:	Yes - a maximum contact temp. of 27°C (back of board & sub floor) <small>Embedded systems only</small>
Sheen:	10% +/-
Maintenance:	Elka Oiled maintenance kit
Installation:	Full stick with Elka Trowel Flex or other PU / MS adhesive

### INSTALLATION OPTIONS

ALL PLANKS COME WITH GROOVES ON 3 SIDES TO ALLOW YOU TO ACHIEVE MULTIPLE DESIGN PATTERNS



HERRINGBONE



DOUBLE HERRINGBONE



DIAGONAL HERRINGBONE

PREFINISHED	All Species	RUSTIC	A - Grade 30%	B - Grade 30%	C - Grade 40%	D - Grade -	For full grading breakdown visit <a href="http://www.elkaflooring.co.uk">www.elkaflooring.co.uk</a>
-------------	-------------	--------	---------------	---------------	---------------	-------------	---

### INSTALLATION IMPLIES ACCEPTANCE

NO WARRANTY WILL BE OFFERED FOR APPEARANCE RELATED CLAIMS ONCE THE PRODUCT IS INSTALLED

**Note: Real wood flooring is a natural product and is subject to natural variations.** Any dissatisfaction on grade quality or definition must in all cases be notified to Unilin prior to installation.